


# FT Series

## FTA12-150 12V150Ah

Sacred Sun front terminal batteries have been designed specifically for applications which demand the highest levels of security and reliability. The monoblocs have excellent high rate performance, compact design and standard footprint for 19" and 23" cabinets. Thick Pb-Ca-Sn alloy grids are designed to resist corrosion and prolong service life.

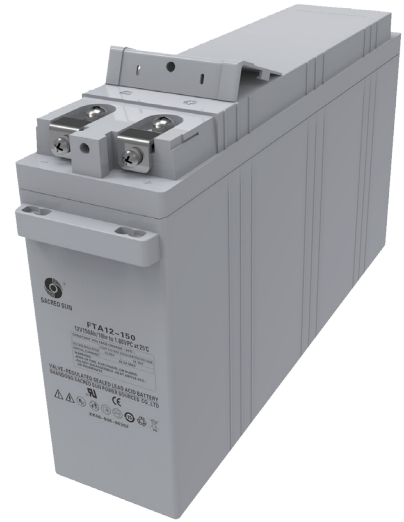

### Benefits

- Long life according to EUROBAT Classification
- High discharge performance
- High gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling
- Centralized venting system


### Applications

- Telecommunications
- Power system
- UPS
- Emergency power
- Data center

### Standards

- IEC 60896-21/22
- BS 6290-4
- EUROBAT guide

### Drawing

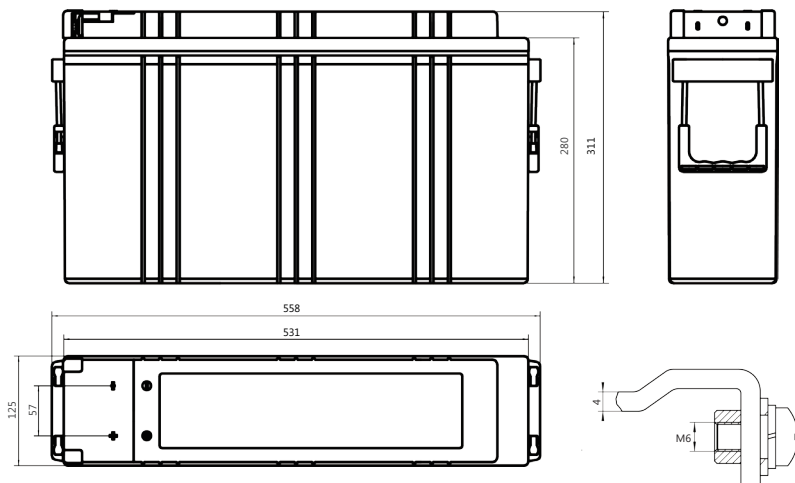

FT-55

### Specifications


Battery Model	FTA12-150			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10HR (15.0A, 1.80V)	5HR (27.0A, 1.80V)	3HR (39.72A, 1.80V)	1HR(84.9A, 1.75V)
	150	135	119.16	84.9
Dimensions (mm)	Length	Width	Height	Total Height
	558	125	311	311
Approx. Weight (kg)	48.5			
Reference Internal Resistance (mΩ)	4.9 ( fully charged @ 25°C)			
Maximum Discharge Current (A/3 Sec.)	1092			
Self-Discharge (25°C)	≤ 1.5% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current: 30A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	2400			

## Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min					h								
	5	10	15	30	45	1	2	3	4	5	6	8	10	20
1.60	414.4	331.5	271.2	180.6	127.0	99.7	59.6	42.96	34.30	28.32	24.12	18.72	15.72	8.45
1.65	387.2	303.6	257.1	170.4	117.9	94.4	58.2	41.76	33.71	27.96	24.12	18.60	15.48	8.36
1.70	356.0	273.2	237.0	162.5	110.4	88.6	56.7	40.92	33.12	27.72	23.76	18.48	15.48	8.32
1.75	328.1	250.3	222.8	154.2	106.6	84.9	55.8	40.44	32.54	27.36	23.52	18.24	15.24	8.28
1.80	292.7	232.6	205.1	143.2	98.7	77.6	54.2	39.72	32.01	27.00	23.28	18.00	15.00	8.26

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min					h								
	5	10	15	30	45	1	2	3	4	5	6	8	10	20
1.60	706.0	568.0	471.4	318.8	231.4	184.0	111.6	81.6	65.7	54.27	46.30	36.18	30.50	16.46
1.65	675.0	535.0	457.0	306.9	217.5	175.8	109.7	79.8	64.9	53.97	46.66	36.16	30.20	16.35
1.70	642.0	498.0	436.5	299.0	206.1	166.8	107.9	78.6	64.0	54.04	46.36	36.13	30.50	16.39
1.75	605.0	467.0	419.0	290.1	201.8	162.0	107.0	77.8	63.2	53.63	46.06	35.93	30.20	16.36
1.80	546.1	436.5	390.1	272.6	188.2	149.0	104.7	77.1	62.3	53.23	45.98	35.63	29.90	16.55


## Performance Curve

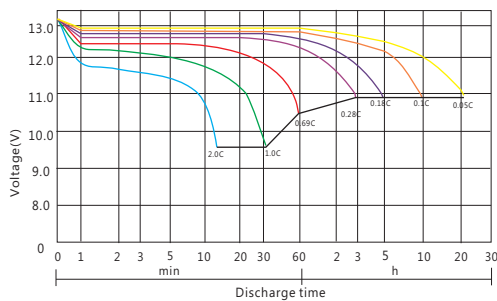


Discharge voltage vs. discharge time

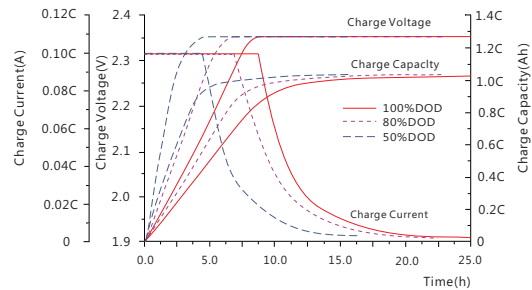

Charge capacity vs. charge time

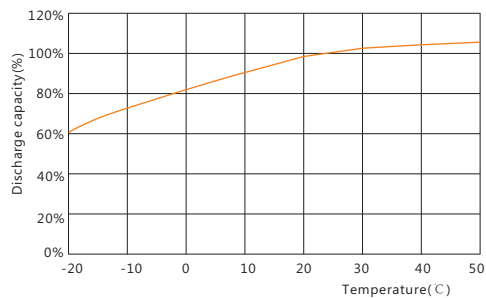

Discharge capacity vs. temperature

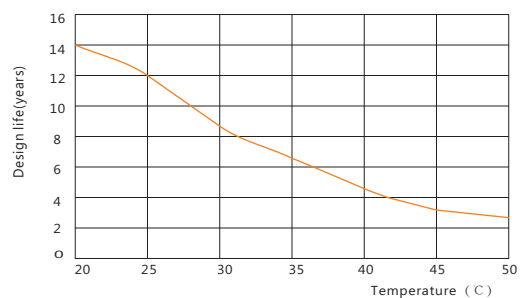

Design life vs. temperature

### Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC  
 Tel: +86-537-4422313 Fax: +86-537-4411980  
 Email: sales@sacredsun.cn

### Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong  
 Email: admin.hk@sacredsun.hk

### Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555  
 Email: admin.sg@sacredsun.sg

### Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France  
 Email: admin.eu@sacredsun.eu

### Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE  
 Email: admin.ae@sacredsun.ae

