



wide range




high protection
IP 65



easy assembly
and
quick fixing




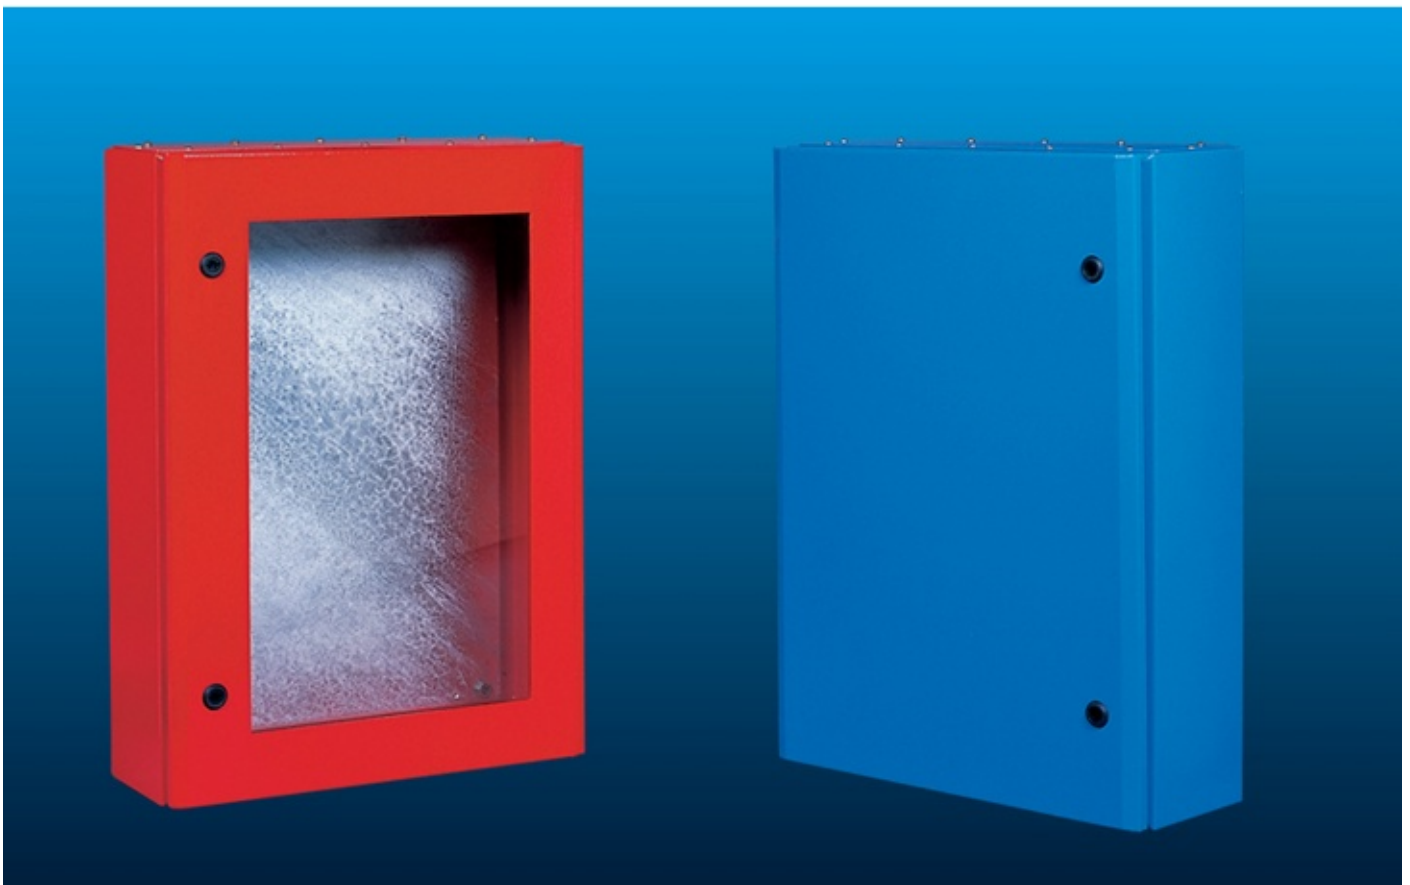


Width A (mm)	Height B (mm)	Depth C (mm)	Enclosures Reference No	Weight (kg)	Gland Sizes		Door	Plate	Hinge	Lock
					D (mm)	E (mm)				
200	300	150	EKO 020315	3.5	160	59	1	2	2	1
300	300	150	EKO 030315	4.6	260	59	1	2	2	1
		200	EKO 030320	5.2	260	109	1	2	2	1
	400	150	EKO 030415	5.4	260	59	1	2	2	1
		200	EKO 030420	6.5	260	109	1	2	2	1
400	500	200	EKO 030520	7.2	260	109	1	2	2	1
		300	EKO 040315	5.3	360	59	1	2	2	1
	400	200	EKO 040420	7.6	360	109	1	2	2	1
		150	EKO 040515	7.8	360	59	1	2	2	1
500	600	200	EKO 040520	8.7	360	109	1	2	2	1
		300	EKO 040620	9.8	360	109	1	2	2	2
	700	200	EKO 040630	12.1	360	191	1	2	2	2
		300	EKO 050520	10.3	460	109	1	2	2	1
600	800	200	EKO 050620	11.3	460	109	1	2	2	2
		300	EKO 050720	13.0	460	109	1	2	3	2
	1000	200	EKO 050730	15.4	460	191	1	2	3	2
		300	EKO 060420	10.3	560	109	1	2	2	2
600	600	200	EKO 060620	14.9	560	109	1	2	2	2
		300	EKO 060630	18.3	560	191	1	2	2	2
	800	200	EKO 060820	19.4	560	109	1	2	3	2
		300	EKO 060830	23.6	560	191	1	2	3	2
1000	1150	200	EKO 061020	24.1	560	109	1	2	3	2
		300	EKO 061030	26.1	560	191	1	2	3	2
	1150	300	EKO 061130	29.4	560	191	1	2	3	2
800	600	200	EKO 080620	21.0	760	109	1	2	3	2
	1000	300	EKO 081030	32.0	760	191	2	2	3+3	1 ⁽¹⁾
	1200	300	EKO 081230	43.6	760	191	2	2	4+4	1 ⁽¹⁾
1000	1000	300	EKO 101030	52.2	960	191	2	2	3+3	1 ⁽¹⁾
	1200	300	EKO 101230	59.0	960	191	2	2	4+4	1 ⁽¹⁾

- Characteristics :**
- Sheet steel enclosure : 1.2 - 1.5 mm
 - door : 1.2 - 1.5 mm
 - mounting plate: 2 mm
 - Foamed-in door sealing gasket.
 - Top and bottom gland plates.
 - Concealed hinges.
 - 170° door opening.
 - IP 65 protection (TS 3033, EN 60529).
 - Powder coating (RAL 7032w).
 - Galvanized mounting plate.

- On Request :**
- Special colour.
 - Special mounting plate.
 - Special sizes.
 - Glazed door.
 - Pre-punching.

⁽¹⁾ : Rod-Latch type lock.

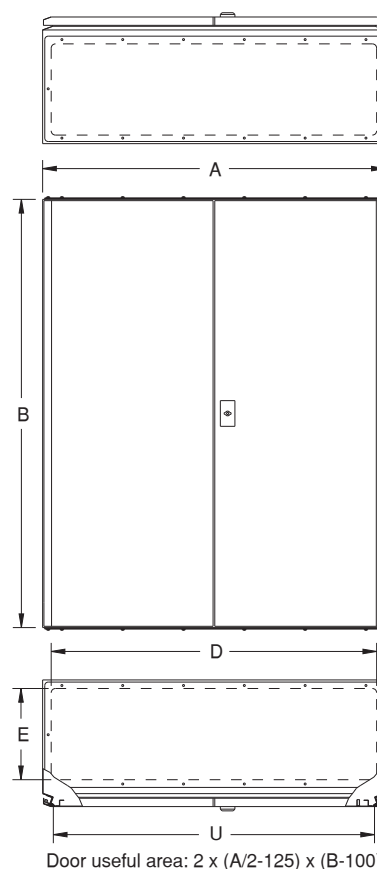
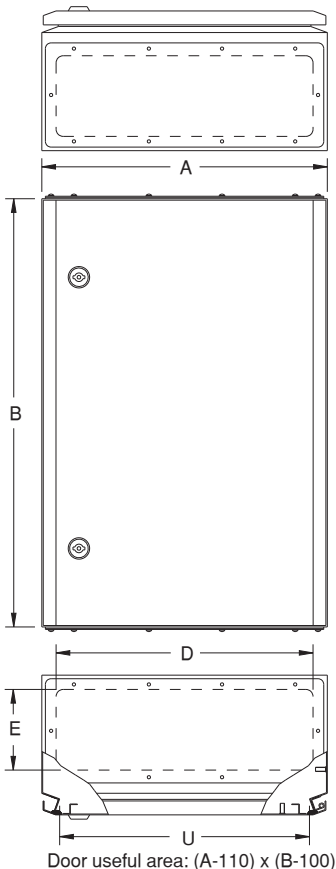


$U = (A - 48) \text{ mm}$
 $V = (B - 48) \text{ mm}$
 $W = (C - 18) \text{ mm}$

Mounting Plates

Enclosures Reference No	Mounting Plate Reference No	Weight (kg)	Mounting Plate Sizes			
			F (mm)	H (mm)	G (mm)	J (mm)
EKO 020315	ETSTS0203	0.6	150	230	100	200
EKO 030315	ETSTS0303	1.0	250	230	200	200
EKO 030320	ETSTS0303	1.0	250	230	200	200
EKO 030415	ETSTS0304	1.4	250	330	200	300
EKO 030420	ETSTS0304	1.4	250	330	200	300
EKO 030520	ETSTS0305	1.8	250	430	200	400
EKO 040315	ETSTS0403	1.3	350	230	300	200
EKO 040420	ETSTS0404	1.9	350	330	300	300
EKO 040515	ETSTS0405	2.5	350	430	300	400
EKO 040520	ETSTS0405	2.5	350	430	300	400
EKO 040620	ETSTS0406	3.1	350	530	300	500
EKO 040630	ETSTS0406	3.1	350	530	300	500
EKO 050520	ETSTS0505	3.3	450	430	400	400
EKO 050620	ETSTS0506	4.1	450	530	400	500
EKO 050720	ETSTS0507	4.8	450	630	400	600
EKO 050730	ETSTS0507	4.8	450	630	400	600
EKO 060420	ETSTS0604	3.2	550	330	500	300
EKO 060620	ETSTS0606	5.0	550	530	500	500
EKO 060630	ETSTS0606	5.0	550	530	500	500
EKO 060820	ETSTS0608	6.9	550	730	500	700
EKO 060830	ETSTS0608	6.9	550	730	500	700
EKO 061020	ETSTS0610	8.7	550	930	500	900
EKO 061030	ETSTS0610	8.7	550	930	500	900
EKO 061130	ETSTS0611	10.1	550	1080	500	1000
EKO 080620	ETSTS0806	6.8	750	530	700	500
EKO 081030	ETSTS0810	11.7	750	930	700	900
EKO 081230	ETSTS0812	14.2	750	1130	700	1100
EKO 101030	ETSTS1010	14.8	950	930	900	900
EKO 101230	ETSTS1012	17.9	950	1130	900	1100

Material : Galvanized steel, 2 mm.

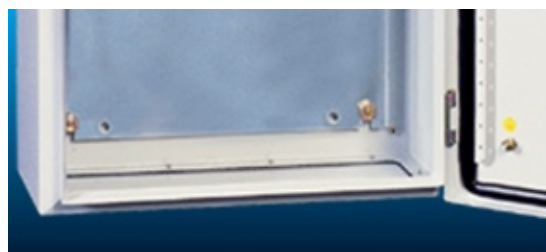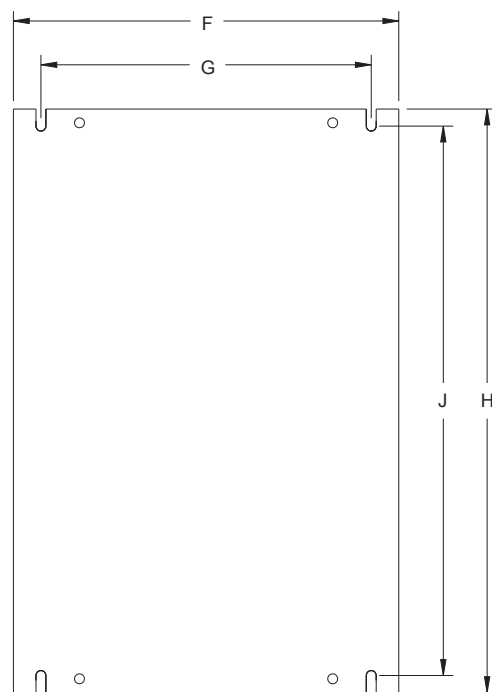

Gland Plates

Width A (mm)	Depth C (mm)	Gland Plates Reference No
200	150	EKO GP2015
300	150	EKO GP3015
	200	EKO GP3020
400	150	EKO GP4015
	200	EKO GP4020
	300	EKO GP4030
500	200	EKO GP5020
	300	EKO GP5030
600	200	EKO GP6020
	300	EKO GP6030
800	200	EKO GP8020
	300	EKO GP8030
1000	300	EKO GP1030

Material : Sheet steel 1.5 mm, powder coating (RAL 7032w).

