

SmartPower 48200

SCIFP48200 lithium-ion battery system

SCIFP48200, a powerful 48V LiFePO₄ battery product, has been especially designed to provide power backup for remote or outdoor telecom sites. Its modular design enables parallel installation meeting also the needs for larger power back up.



Benefits

- Increased energy in given space
- Easy installation and upscaling
- High operational reliability
- Optimized supervision strategy through remote control/diagnostic
- Excellent long life time
- Built-in intelligent BMS to protect the battery pack at any time and prolong its service life

Standards


a. Product

- IEC 60950
- IEC 62321
- IEC 62133
- UN 38.3
- UL 1642
- UL 1973

b. MS certification

- ISO 9001
- ISO 14001
- OHSAS 18001

Drawing

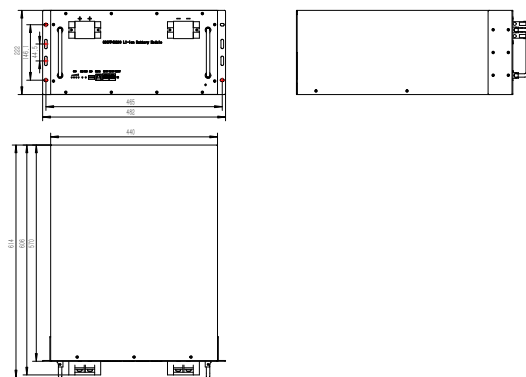


Specifications

Nominal Characteristics		
Battery Model	SCIFP48200	
Nominal Voltage	48V	
Typical Capacity	200Ah(25°C,0.2C)	
Typical Energy	9600 Wh	
Volumetric Energy Density	172.4 Wh/dm ³	
Gravimetric Energy Density	117.8 Wh/kg	
Dimensions	Width	440mm
	Height	222mm(5U)
	Depth	570mm
Reference Weight	81.5Kg	
Electrical Characteristics		
Voltage Window	40.5~54.0V	
Charge Voltage Range	52.5~54.0V	
Max. Continuous Discharge Current	100A	
Max. Continuous Charge Current	100A	
Faradic Charge Efficiency	99% (+20°C)	
Energy Charge Efficiency	94% (+20°C)	
Communication Interface (optional feature)	Modbus/SNMP/TACP	
Additional Features (optional feature)	LCD Display	
Operation Environment		
Charge Temperature	0°C to +55°C	
Discharge Temperature	-20°C to +60°C	
Storage Temperature	-20°C to +60°C	
Protection Class	IP20	


Discharge Data

Constant Current Discharge Data(25 °C)							
Voltage/V	Current/A	0.1C	0.2C	0.3C	0.33C	0.4C	0.5C
	Time/h						
45.0		9.475	4.858	3.254	2.925	2.420	1.925
43.5		9.927	4.948	3.309	2.988	2.453	1.960
42.0		10.003	4.996	3.344	3.046	2.494	1.990
40.5		10.101	5.044	3.359	3.048	2.510	2.001


Performance Curve

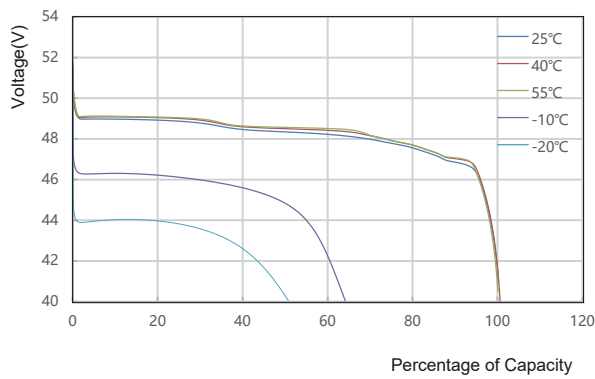


Discharge Curve at Different Temperature

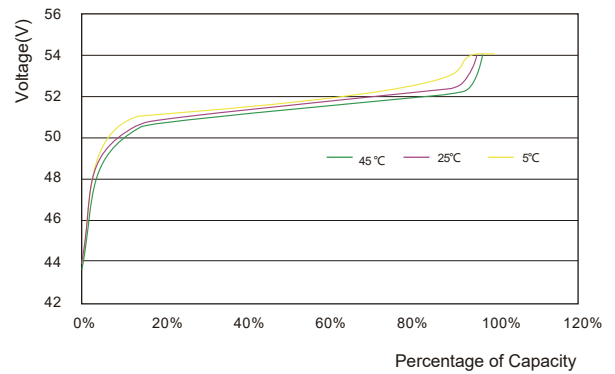

Charge Curve at Different Temperature

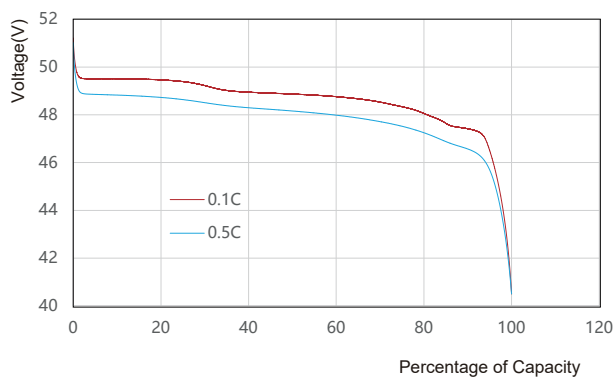

Discharge Curve at Different Rate (25 °C)

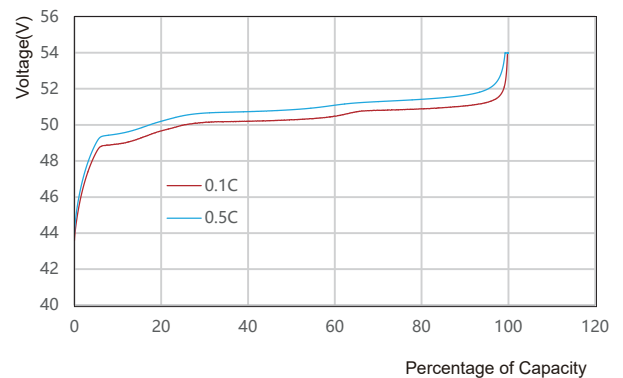

Charge Curve at Different Rate (25 °C)

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
Tel: +86-537-4422313 Fax: +86-537-4411980
Email: sales@sacredsun.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
Email: admin.hk@sacredsun.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
Email: admin.sg@sacredsun.sg

Sacred Sun Europe SARL

Add: ZAE Fontaine, 33210 Fargues, France
Email: admin.eu@sacredsun.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
Email: admin.ae@sacredsun.ae